

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ :
A47L 9/16

A1

(11) International Publication Number: WO 96/19937

(43) International Publication Date: 4 July 1996 (04.07.96)

(21) International Application Number: PCT/GB95/03041

(22) International Filing Date: 27 December 1995 (27.12.95)

(30) Priority Data:
9426287.0 28 December 1994 (28.12.94) GB

(71) Applicant (for all designated States except US): NOTETRY LIMITED [GB/GB]; Sycamore House, Bathford, Bath BA1 7RS (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): DYSON, James [GB/GB]; Sycamore House, Bathford, Bath BA1 7RS (GB).


(74) Agent: SMITH, Gillian, Ruth; Marks & Clerk, 57-60 Lincoln's Inn Fields, London WC2A 3LS (GB).

(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, LS, MW, SD, SZ, UG).

Published

With international search report.

(54) Title: SHROUD AND CYCLONIC CLEANING APPARATUS INCORPORATING SAME

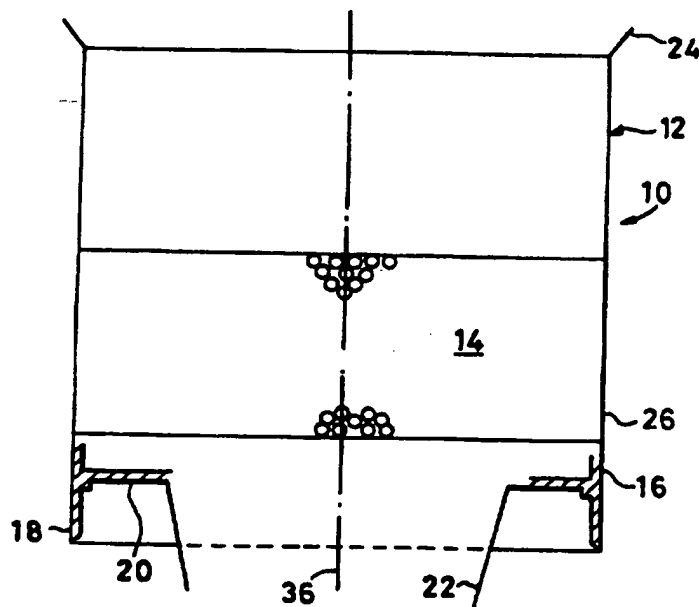

(57) Abstract

The invention provides a shroud (10; 40) for use in apparatus incorporating cyclonic dust separation means for separating dirt and dust from an airflow, the shroud (10; 40) comprising a perforated portion (14; 44) having a multiplicity of perforations (30; 46) for allowing the airflow to pass therethrough. According to the invention, the upstream edge of each perforation (30) meets the upstream surface (28) of the shroud (10) at a sharply defined angle. The invention improves the performance of the dust separation apparatus in conjunction with which the shroud (10; 40) is utilised.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

SHROUD AND CYCLONIC CLEANING APPARATUS INCORPORATING SAME

The invention relates to an improved shroud and to apparatus incorporating an improved shroud.

A shroud is used in conjunction with cyclonic dust separation means to filter an airflow. In apparatus incorporating dual cyclonic separation means, ie. two separate cyclones arranged in series to remove, initially, larger pieces of dirt and fluff and, subsequently, finer dust particles, the shroud is positioned between the two cyclone arrangements and the airflow is passed through the shroud to reduce the possibility of larger pieces of dust and fluff entering the second, high efficiency cyclone.

It has been found that various features of the shroud have an effect on the overall performance of the separation means. It is therefore an object of the invention to provide a shroud which improves the overall performance of the cyclonic dust separation means in conjunction with which it is used.

The invention provides a shroud as claimed in claim 1. Advantageous and preferable features are set out in the subsidiary claims. When used in conjunction with

dual cyclonic separation means, these arrangements improve the percentage of dirt, dust and fluff remaining in the low efficiency cyclone which, in turn, improves the performance of the high efficiency cyclone and thus of the entire separation means.

Embodiments of the invention will now be described with reference to the accompanying drawings, wherein:

Figure 1 is a side view, partially in section, of a shroud incorporating the present invention;

Figure 2a is an enlarged sectional view of part of the wall of the perforated portion of the embodiment shown in Figure 1;

Figure 2b is an enlarged detail of the embodiment shown in Figure 1;

Figure 3 is a side view of a second embodiment of the present invention; and

Figure 3a is an enlarged section through part of the wall of the perforated section of the embodiment shown in Figure 3.

Figure 1 shows a shroud 10 having a cylindrical portion 12 in which is located a perforated portion 14. The perforated portion 14 has a lower edge 16 from which depends a lip 18 which will be described in greater detail below. Extending radially inwardly from the lower edge 16 of the perforated portion 14 is an annular web 20 which communicates with or seals against an inner cyclone 22. The inner cyclone 22 forms no part of the

present invention and will not be described in any further detail here. The web 20 effectively forms support means for and a seal against the cylindrical portion 12. Further support and sealing means 24 are located at the upper edge of the cylindrical portion 12 but which, again, do not form part of the present invention, except to support the cylindrical portion 12.

Figure 2a shows, in sectional view, a portion of the wall 26 forming the perforated portion 14. The wall 26 has an upstream surface 28 and a multiplicity of perforations 30 through which, in use, the airflow passes in the direction of arrows 32. In prior art shrouds, the perforations have been formed in such a manner that the upstream edge of each perforation incorporates a radius at its intersection with the upstream surface of the shroud. According to the present invention, the upstream edge of each perforation 30 meets the upstream surface 28 at a sharply defined angle. Such an angle can be produced by forming the perforations 30 by drilling or, if desired, by moulding or any other suitable manufacturing process. The provision of a sharp angle at the intersection between the upstream edge of each perforation 30 and the upstream surface 28 of the shroud 10 decreases the amount of fine dust passing through the perforations 30 and therefore decreases the risk of the perforations 30 becoming blocked by dust and fluff particles.

The thickness of the material t forming the wall 26 is substantially 2mm. The diameter d of each cylindrical perforation 30 is substantially 2.2mm.

The embodiment shown in Figure 1 includes a lip 18 depending from the lower edge 16 of the perforated portion 14. The lip 18, which is shown in more detail in Figure 2b, essentially comprises a parallel sided portion 34 extending substantially parallel to the longitudinal axis 36 of the shroud 10. The distal end of the parallel-sided portion 34 is inclined at an angle α of substantially 45° . At the proximal end of the lip 18, a step 38 is formed, the breadth b of the step 38 being substantially the same as the breadth B of the parallel-sided portion 34. Both the breadth b and the breadth B are, in the embodiment shown, substantially 2mm.

The height h of the step 38 corresponds substantially to the breadth b of the step 38 and, again, is approximately 2mm in this embodiment.

The distance x to which the lip 18 extends below the lower edge 16 of the perforated portion 14 is approximately 15mm.

It has been found that this shape of bottom lip 18 of the shroud 10 reduces the amount of blockage of the perforations 30 in the shroud 10 and the amount of fine dust passing through the perforations 30 when used in dual cyclonic vacuum cleaning apparatus with the shroud

10 being positioned in the airflow path between a low efficiency cyclone and a high efficiency cyclone. A relatively large proportion of dirt and dust is retained in the low efficiency cyclone and the step 38 also improves the seal between the lip 18 and the lower edge 16 of the perforated section 14.

Figure 3 illustrates a second embodiment of the invention. In Figure 3, a frusto-conical shroud 40 is illustrated having support means 42 located at the upper end thereof. A frusto-conical perforated portion 44 is located in the frusto-conical shroud 40. A multiplicity of perforations 46 are arranged in the perforated portion 44 and Figure 3a is a sectional view through part of the side wall 48 of the perforated portion 44.

As can be seen from Figure 3a, the thickness t of the material forming the side wall 48 of the shroud 40 is substantially 2mm. Also, the diameter d of each cylindrical perforation 46 is substantially 2.2mm. The longitudinal axis of each perforation 46 is substantially perpendicular to the longitudinal axis 50 of the shroud 40 and the angle at which the interior wall of each perforation meets the external surface of the side wall 48 is sharply defined.

In the embodiment shown, the angle of inclination θ of the side wall 48 to the longitudinal axis 50 of the shroud 40 is substantially 12.5°. However, this angle could be varied according to the requirements of

the cyclonic dust separating apparatus and particularly to the angle of inclination of the inclined wall of the high efficiency cyclone. The angle of inclination β is preferably substantially identical to the angle of inclination of the wall of the high efficiency cyclone so that the wall 48 of the shroud 40 can be located parallel to the inclined wall of the high efficiency cyclone whilst still providing for the passage of air between the perforations and the high efficiency cyclone.

It has been found that the provision of sharply defined perforations 46 having a diameter of 2.2mm is advantageous in that the amount of fine dust passing through the shroud is reduced thus reducing the likelihood of the shroud becoming blocked by dust or fluff. The provision of a conical shroud 40 increases the volume of the area of the low efficiency cyclone in which dirt and dust is collected thus increasing the capacity of the cyclone.

It will be appreciated by a skilled reader that the invention is not limited to the embodiments illustrated above. Various modifications and alterations will be apparent to the skilled reader as falling within the scope of the invention.

CLAIMS

1. A shroud for use in apparatus incorporating cyclonic dust separating means for separating dirt and dust from an airflow, the shroud having an upstream surface and comprising a perforated portion having a multiplicity of perforations for allowing the airflow to pass therethrough, wherein the upstream edge of each perforation meets the upstream surface of the shroud at a sharply defined angle.
2. A shroud as claimed in claim 1, wherein the sharply defined angle is substantially 90°.
3. A shroud as claimed in claim 1 or 2, wherein each perforation is cylindrical and has a diameter of substantially 2.2mm.
4. A shroud as claimed in any one of the preceding claims, wherein the thickness of the perforated portion in the longitudinal direction of the perforations is substantially 2mm.
5. A shroud as claimed in any one of the preceding claims, wherein the perforated portion is cylindrical.
6. A shroud as claimed in any one of the preceding

claims, wherein the shroud further comprises a lip depending from a lower edge of the perforated portion.

7. A shroud as claimed in claim 6, wherein the lip comprises a parallel-sided portion having an inclined distal end.

8. A shroud as claimed in claim 7, wherein the distal end is inclined at an angle of substantially 45° to the parallel sides of the lip.

9. A shroud as claimed in claim 7 or 8, wherein the parallel sides of the lip extend substantially parallel to the longitudinal axis of the shroud.

10. A shroud as claimed in any one of claims 7 to 9, wherein the lip extends between 10mm and 20mm below the lower edge of the perforated portion.

11. A shroud as claimed in claim 10, wherein the lip extends substantially 15mm below the lower edge of the perforated portion.

12. A shroud as claimed in any one of claims 7 to 11, wherein the lip is broader in cross-section at its proximal end than at its distal end.

13. A shroud as claimed in claim 12, wherein the lip comprises a step formed radially inwardly of the parallel-sided portion at the proximal end thereof.

14. A shroud as claimed in claim 13, wherein the breadth of the step is substantially equal to the breadth of the parallel-sided portion.




15. A shroud as claimed in claim 13 or 14, wherein the height of the step is substantially equal to the breadth thereof.

16. A shroud for use in apparatus incorporating cyclonic dust separation means for separating dirt and dust from an airflow, substantially as hereinbefore described with reference to any one of the embodiments shown in the accompanying drawings.

17. Apparatus for separating dirt and dust from an airflow comprising cyclonic dust separation means and a shroud according to any one of the preceding claims.

18. Apparatus as claimed in claim 17, wherein the cyclonic dust separation means comprise a low efficiency cyclone and a high efficiency cyclone positioned downstream of the low efficiency cyclone, the shroud being positioned between the two cyclones.

19. Apparatus as claimed in claim 17 or 18, wherein the apparatus consists of a vacuum cleaner.

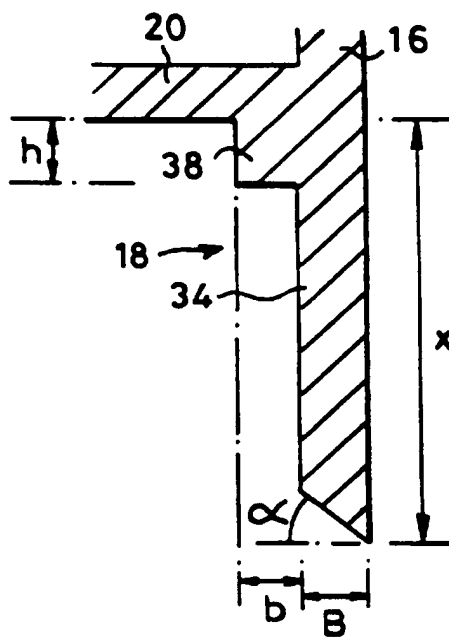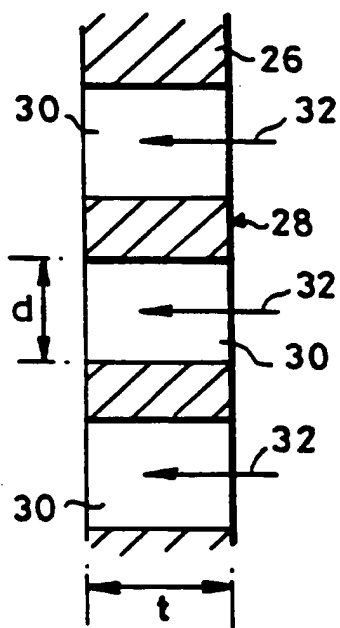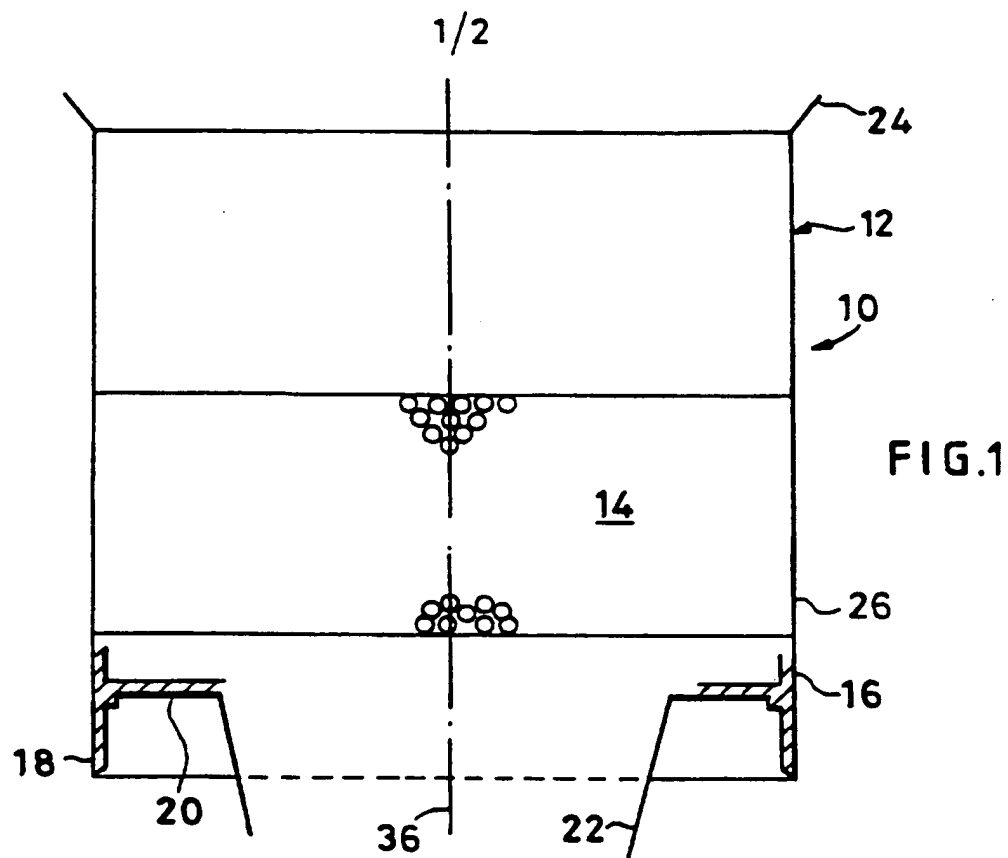

2/2

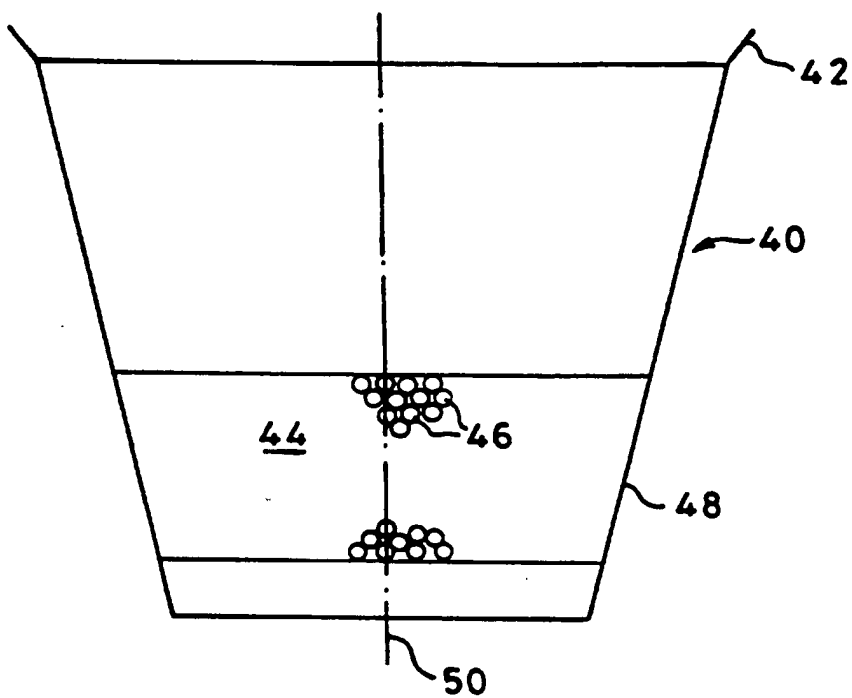


FIG. 3

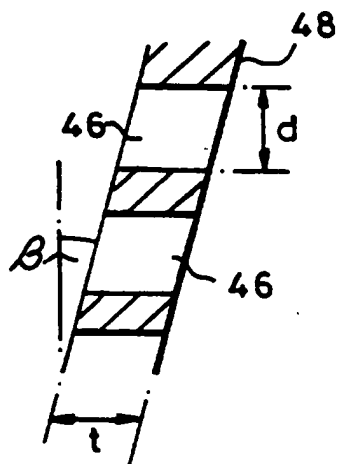


FIG. 3a

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 95/03041

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP,A,0 557 096 (IONA APPLIANCSE INC) 25 August 1993 see column 6, line 50 - column 7, line 26; figures 4,6 -----</p>	<p>1-5, 16-19</p>

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 95/03041

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-489565	10-06-92	US-A- 5078761	07-01-92
		AT-T- 123639	15-06-95
		AU-B- 637272	20-05-93
		AU-B- 8819491	11-06-92
		CA-A,C 2056161	04-06-92
		DE-D- 69110424	20-07-95
		DE-T- 69110424	01-02-96
		EP-A- 0636338	01-02-95
		JP-A- 5176871	20-07-93
		JP-B- 6085753	02-11-94
EP-A-636338	01-02-95	US-A- 5078761	07-01-92
		AT-T- 123639	15-06-95
		AU-B- 637272	20-05-93
		AU-B- 8819491	11-06-92
		CA-A,C 2056161	04-06-92
		DE-D- 69110424	20-07-95
		DE-T- 69110424	01-02-96
		EP-A- 0489565	10-06-92
		JP-A- 5176871	20-07-93
		JP-B- 6085753	02-11-94
US-A-5062870	05-11-91	US-A- 5078761	07-01-92
US-A-4853008	01-08-89	AU-B- 610745	23-05-91
		AU-B- 3903089	01-03-90
EP-A-557096	25-08-93	CA-A- 2061469	20-08-93
		AU-B- 3307193	26-08-93
		JP-A- 6054778	01-03-94
		US-A- 5267371	07-12-93